


# REAR OPERATING CONTROL HANDLE FOR RS 2

**TILTA**

控制提壶手柄

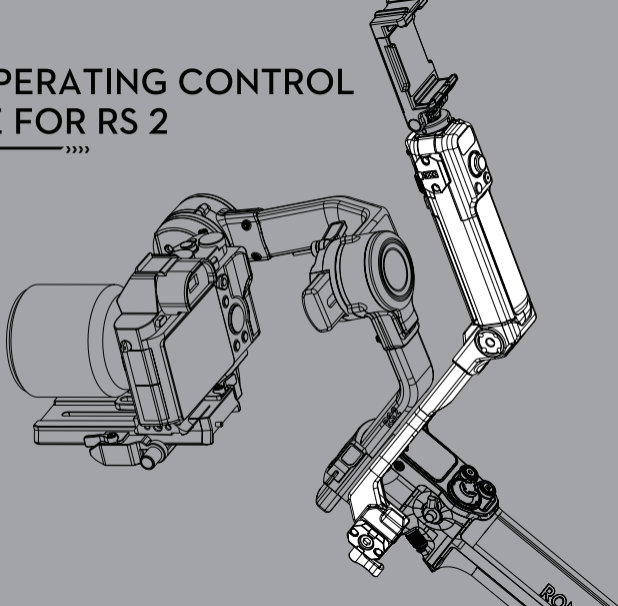

v1.0

2020.11

## 免责声明和警告

感谢您购买 TILTA 产品。本文所提及的内容关系到您的安全以及合法权益与责任。

使用本产品之前, 请仔细阅读本文以确保已对产品进行正确的设置。不遵循和不按照本文的说明与警告来操作可能会给您和周围的人带来伤害, 损坏本产品或其它周围的物品。本文档及本产品所有相关的文档最终解释权归 TILTA 所有。如有更新, 恕不另行通知。请访问 [www.tilta.com](http://www.tilta.com) 官方网站以获取最新的产品信息。

一旦使用本产品, 即视为您已经仔细阅读免责声明与警告, 理解、认可和接受本声明全部条款和内容。您承诺对使用本产品以及可能带来的后果负全部责任。您承诺仅出于正当目的使用本产品, 并且同意本条款以及 TILTA 制定的任何相关条例、政策和指引。


TILTA 对于直接或间接使用本产品而造成的损坏、伤害以及任何法律责任不予负责。用户应遵循包括但不限于本文提及的所有安全指引。

即使存在上述规定, 消费者权益依然受当地法律法规所保障, 并不受本免责声明影响。

TILTA 是深圳市铁头科技有限公司及其关联公司的商标。本文出现的产品名称、品牌等, 均为其所属公司的商标或注册商标。

## In the Box | 物品清单

---




Mechanical Extension for Dual Handle  
Power Supply Bracket

控制手柄  
× 1




1/4\"-20 Screw  
1/4\"-20螺丝  
× 1



NATO Connection Rear Operating Bracket

Nato触点接驳件  
× 1



3/16 Wrench  
3/16扳手  
× 1





NATO Rail for Rear Operating

NATO滑条  
× 1


# 认识

## 提壶手柄

1. Type-C 输出口
2. 菜单键 (MENU键)
3. 前置拨轮
4. 跟焦切换键
5. Trigger键
6. 1/4" -20 防偏转螺孔
7. NATO滑条
8. 手钮螺丝

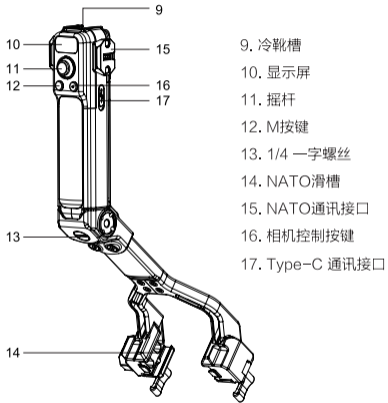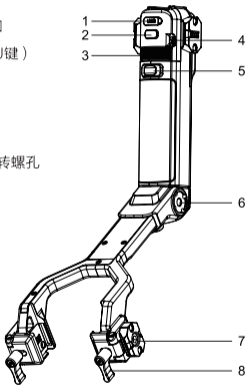


## 按键功能




### 菜单键 (MENU 键)

单击: 切换主界面  
双击: 云台休眠  
再双击: 唤醒云台  
长按: 进入菜单功能设置



### 电子跟焦轮 \*

在菜单里设置原力系列电机相对应参数后, 转动跟焦轮可以控制原力系列电机




### Trigger 键

单击: 开始智能跟随  
(安装图传系统并开启)  
双击: 云台回中  
三击: 进入自拍模式  
长按不放: 进入锁定模式




### 跟焦切换键

Up: 控制大疆跟焦电机  
Down: 控制原力系列电机




### 摇杆

上下摇动: 控制俯仰轴运动  
(默认)  
左右摇动: 控制平移轴运动  
(默认)



### 相机控制按键 \*

半按: 控制自动对焦  
短按: 开始或停止录像  
长按: 拍照




### M 按键

单击: 切换配置参数  
长按不放: 进入运动模式。长按并双击扳机锁定运动模式, (不需保持长按不放) 重复可退出。  
双击: 竖拍模式, 再次双击 M 键取消竖拍模式。  
三击: 进入 360 旋转模式, 重复可退出。360 旋转模式下, 向左或向右连续摇动摇杆两次, 可使相机自动旋转, 双击扳机键可停止。


\* 相机控制按键以及前置拨轮功能要求连接相应的快门控制线, 并根据相机的实际情况有所区别。

## 组装


1. 将手柄部分按图所示插入NATO供电底部滑槽。




2. 对准孔位，扭紧螺丝。



3. 左侧可安装NATO滑条。





4. 完成提壶手柄安装。



## 使用安装

- ① 装配时需完全松开两侧的手钮螺丝。
- ② 将提壶手柄沿图所示方向，从下到上滑入DJI RS 2左右两侧的NATO接口（需注意右侧的触针）。

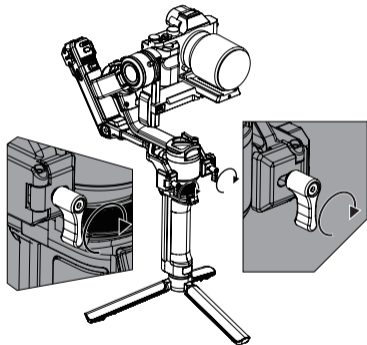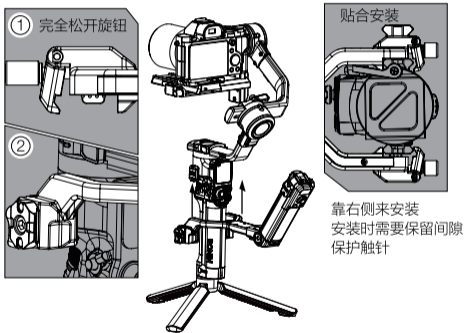

注：装配和拆卸时，都需注意右边的触针，旋钮需松到最大限位，请严格按照说明书来使用，以免对触针造成损伤。




## 菜单功能

长按menu键 进入菜单键

单击menu键 回到主菜单

双击menu键 云台休眠

进入菜单栏（M键是确定键，录制键是返回键，摇杆（上下为上下选，左右无效，长按3S为快速选择）

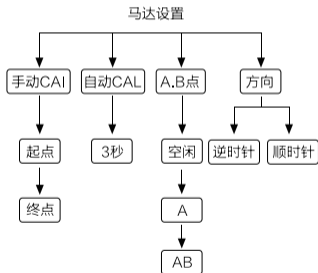



## DISCLAIMERS AND WARNINGS



Thank you for purchasing a TILTA product. What is mentioned in this article is related to your safety, legal rights and liabilities. Before using this product, please read this article carefully to ensure a proper configuration. Failure to follow the instructions or any disregard for the warnings may cause harm to you and other people, and may cause damage to this product and surrounding objects. TILTA owns the right to final interpretation of this document and all other collateral documents. Updates on information are subject to change without prior notice. For up-to-date product information, please visit the official website, [www.tilta.com](http://www.tilta.com).

By using this product, you hereby signify that you have read this disclaimer and warning carefully and that you understand, agree to, and accept the terms and conditions herein. You agree that you are solely responsible for your own conduct while using this product and for any consequence thereof. You agree to use this product only for proper purposes and abide by all the terms, policies and guidelines TILTA has made and may make.

TILTA accepts no liability for damage, injury or any legal responsibility incurred directly or indirectly from the use of this product. The user shall observe safe practices including, but not limited to, those set forth in this document.

Despite the terms mentioned above, consumers' rights and interests are still protected by local laws and regulations, and are not affected by this disclaimer.

TILTA is a trademark of Shenzhen TILTA Technology Co., Ltd. and its affiliated companies. Product names and brands in this document are trademarks or registered trademarks of its affiliates.

## LAYOUT

### REAR OPERATING CONTROL HANDLE

1. USB-C Port

2. MENU

3. Front Wheel



4. Focus Switch

5. Trigger

6. 1/4" 20 Arri Standard Mounting Point

7. NATO Connector

8. Tie Down

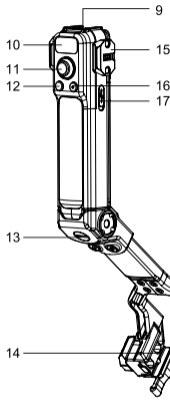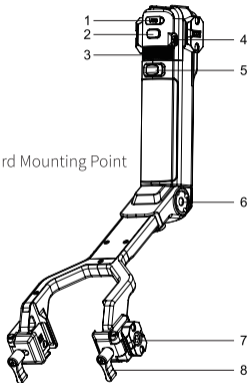

9. Cold Shoe

10. Display

11. Joystick

12. M Key

13. 1/4" 20 Screw Slot


14. NATO Slot

15. Electronic NATO Connector

16. Camera Control

17. USB-C Port

## FUNCTION KEYS




### MENU

**Single click:** Switch interface

**Double click:** Gimbal sleep mode


**Double click again:** Wake up the gimbal

**Hold:** Menu settings



### FRONT FOCUS WHEEL \*

Setting up the connection to Nucleus motors in the menu settings will allow you to use a Nucleus series lens control motor.



### TRIGGER


**Single click:** Start smart following (wireless video system not activated)  
**Double click:** Reset gimbal  
**Triple click:** Selfie mode  
**Hold:** Lock mode



### FOCUS CONTROL SWITCH

**Up:** Control DJI follow focus motor


**Down:** Control Nucleus follow focus motor



### JOYSTICK

**Up & down:** Control tilt (default setting)

**Left & right:** Control pan (default setting)




### CAMERA CONTROL \*

**Half way hold:** Auto focus control

**Quick click:** Start/stop recording

**Long hold:** Take photos



### M KEY

**Single click:** Switch settings

**Long hold:** Sports mode. Holding while double-clicking the trigger will lock the sports mode (no need to hold too long). Repeat the same action to exit the sports mode.


**Double click:** Vertical mode. Double click again to exit the vertical mode.

**Triple click:** 360 mode. Repeat triple click to exit 360 mode. Under 360 mode, pressing the joy stick twice either left or right will make the camera spin automatically. Double click trigger to stop this action.


\* R/S cable is required to use the Camera Control Key and Front Focus Wheel. Please check your own camera's settings to operate accordingly.

## ASSEMBLY


1. Slide the handle into the slot on the bottom of NATO power module.




2. Align with the locating pin and tighten the screw.



3. Install the NATO rail on the left side.






4. The rear operating handle setup is complete.




## INSTALLATION

1. Loosen both tie down screws completely.
2. Slide the operating handle upwards along the two NATO connectors on DJI RS 2 as shown in the figure. (Please use with caution when connecting the contact pins on the right side.)



Align the right side to install and reserve enough space to protect the contact pins.

2. Tighten the tie downs. The setup is complete.

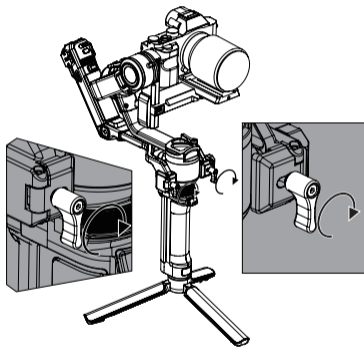

NOTE: When assemble and disassemble, please use with caution around the contact pins. Loosen the tie downs as much as you can. Please follow the instructions carefully and avoid any damages to the contact pins.


## MENU SETTINGS

**Long Hold Menu Key:** Enter the menu settings

**Single Click Menu Key:** Back to the main menu

**Double Click Menu Key:** Gimbal sleep mode

**Enter Menu Settings:** To confirm, press M key. The record key is the back key. To move up and down, push the joystick up and down.  
To quickly select, hold the joystick for 3 seconds.

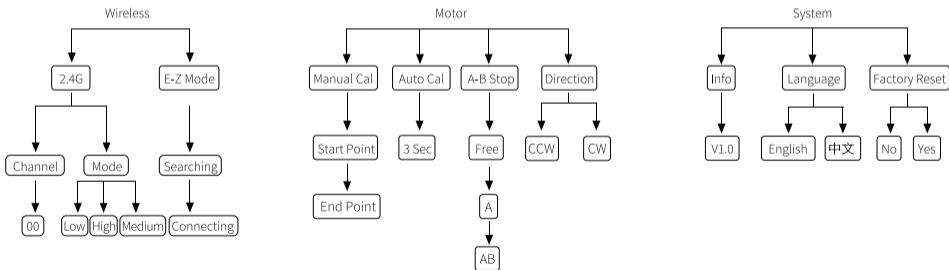

# TILTA

版权由深圳铁头科技有限公司所有

需授权方可转载

本公司有权在不提前通知的情况下修改产品参数

产品尺寸仅供参考，以实物为准

**TILTA** 是深圳铁头科技有限公司的注册商标

---

官方网站: [tilta.com.cn](http://tilta.com.cn) [www.tilta.com](http://www.tilta.com)

中国地址: 深圳市光明新区光侨路转7号路 侨德高新科技园B栋2楼

全国服务热线: 4006 1998 67

All copyrights belong to Tilta Technology Co. Ltd.

Written permission is needed for any reproductions.

Tilta has the right to adjust product specification without notice.

All measurements are for reference only. Please see the actual products for more details.

**TILTA** are registered trademarks owned by Tilta Technology Co., Ltd.

---

Website: [www.tilta.com](http://www.tilta.com)

US Address: 2801 W Magnolia Blvd, Burbank, CA 91505

US Contact Number: +1(818)651-4991



关注微信公众号



扫码进入官网